

# ASSEMBLY MANUAL: BLINDS HIT I

## ASSEMBLY

Assemble exactly according to this manual to prevent redundant assembly errors and other related problems.

### AIDS FOR ASSEMBLY:

- electric drill, drills
- cross-head screwdriver
- knife, scissors, pliers

	for fixing blinds	for fixing the holder of the chain	hole for tightening pin
screw	3,9 x 16; 3,9 x 22	3,9 x 16	3.2 mm for plastic windows and Al windows; 3 mm for wooden windows
drill with the diameter Ø	2,5 mm	2,5 mm	

### INSPECTION:

- Before assembly we recommend inspecting all parts after the delivery of the goods to prevent any problems. The manufacturer must be notified of any defects or comments concerning the assembly or blinds.

### ASSEMBLY

- never expand the blind before assembly
- on the blind in the window wing check that the dimension corresponds to the width of the window
- check that the control mechanism is located on the correct side; it is possible to relocate the control mechanism, if necessary, although only after being properly trained
- depending on the depth and form of the glazing bar, support the blind using pads
- screw the blind to the window frame using two or three screws according to the size of the blind; for plastic windows only screw into the glazing bar in order to prevent damage to the window wing.
- drill upwards into the lower part of the glazing bar and drill holes for the tightening pins for the leading nylon which pass in the side boards, then tighten the redundant ends and insert the remaining ends of the nylon into the upper profile of the blind.
- cover boards with decorative covers
- fix the clamping piece of the chain; for plastic windows, again only into the glazing bar,
- check the function of the blind



If it is not possible to drill holes for the tightening pins into the glazing bar from upwards because of the shape or the size of the glazing bar, choose the option of drilling the holes for pins into the face of the glazing bar. With this option take care not to damage the glass with the drill. It is important to measure the correct depth of the drilling! The client must be informed in advance of this form of assembly and consent in writing in the handing over protocol. Finally, ensure the full functionality of the blind and the window.

### ATTENTION!

During assembly it is necessary to place the blind in the window when it is lifted up; mark the position of the screws on the window wing, fit the blind and then lower it. Each manipulation of the blind before assembly (if necessary) is only to be performed in the horizontal position. Any other manipulation is forbidden and claims for such damaged blinds will not be accepted!

### ATTENTION!

Pursuant to the EN 13120:2014 standard, window blinds shall be installed in accordance with the following instructions:

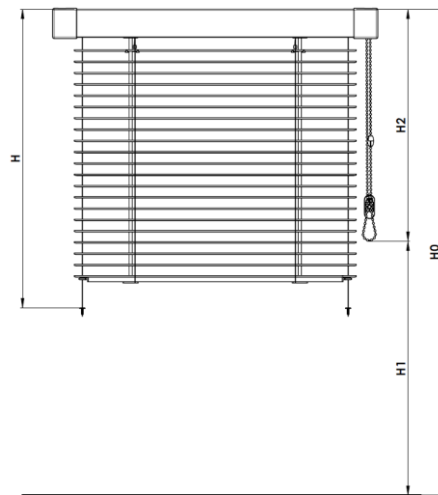


Chain:

If abreakaway coupler is used:

The chain length must be limited as follows:

- 1) If installation height (H0) is not specified, the chain length (H2) shall be less than or equal to 2/3 of the blindheight (see Fig.):  $H2 \leq \frac{2}{3} H$ .
- 2) If installation height (H0) is specified, the distance from the floor to the bottom part of the pull cord (H1) shall be at least 0.6 m:  $H1 > 0.6 \text{ m}$ .

A dangerous loop must be eliminated when a mass of 6 kg is applied or within 5 seconds of application.



APPLY ONE HALF OF THE COUPLER TO EACH END OF THE CHAIN AND THEN LOCK BOTH COUPLER HALVES.



## ILLUSTRATIVE ASSEMBLY

